



POLISHED
VITRIFIED TILES



60x60cm
SOLUBLE SALT



POLISHED
VITRIFIED TILES




60x60cm
Polished vitrified tiles

POLISHED
FINISH



Preview of ALASKA



CREMA



ALASKA



TROPICANA



POLISHED
VITRIFIED TILES

60x60cm

Polished vitrified tiles


POLISHED
FINISH



WAVE



PASTA

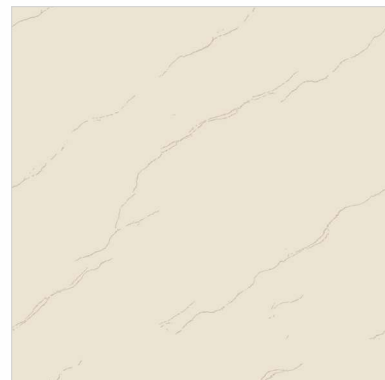

VOLKAS



Preview of VOLKAS



POLISHED
VITRIFIED TILES

60x60cm

Polished vitrified tiles

POLISHED
FINISH



Preview of STELA



RIVER



STELA



PINE WOOD



POLISHED
VITRIFIED TILES



60x60cm
Polished vitrified tiles

POLISHED
FINISH



OAK WOOD



SPICEBUSH



RADO



Preview of SPICEBUSH

TECHNICAL SPECIFICATION OF POLISHED VITRIFIED TILES

	CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP BIa	MEAN VALUE OF OUR POLISHED VITRIFIED TILES	TEST METHOD
Regulatory Properties	Deviation In Length & Width	±0.50%	±0.10%	ISO-10545-2
	Deviation In Thickness	±5.00%	±4.00%	ISO-10545-2
	Straightness Of Sides	±0.50%	±0.10%	ISO-10545-2
	Rectangularity	±0.50%	±0.10%	ISO-10545-2
	Surface Flatness	±0.50%	±0.20%	ISO-10545-2
	Color Differences	Unaltered	No Change	ISO-10545-16
	Glossiness	As per Mfg.	Min. 90%	GLOSSOMETER
Structural Properties	Water Absorption	<0.50%	<0.05%	ISO-10545-3
	Apparent Density	>2.00 g/cc	>2.10 g/cc	DIN 51082
Massive Mechanical Properties	Modulus of Rupture	Min 35N/mm ²	Min 40N/mm ²	ISO-10545-4
	Breaking Strength	Min 1300 N	Min 2000 N	ISO-10545-4
	Impact Resistance	As Per Mfg.	Min. 0.55	ISO-10545-5
Surface Mechanical Properties	Deep Abrasion Resistance	Max 175mm ³	Max 132mm ³	ISO-10545-6
	Moh's Hardness	Min. 6	7	EN 101
	Surface Abrasion Resistance	As Per Mfg.	N. A.	ISO-10545-7
Thermo Hygrometric Properties	Frost Resistance	No Damage	Frost Proof	ISO-10545-12
	Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
	Moisture Expansion	Nil	Nil	ISO-10545-10
	Thermal Expansion(COE)	Max 9.0 X 10 ⁻⁶	Max 6.5 X 10 ⁻⁶	ISO-10545-8
	Crazing Resistance	As Per Mfg.	N. A.	ISO-10545-11
Chemical Properties	Chemical Resistance	No Damage	No Damage	ISO-10545-13
	Stain Resistance	Resistant	Resistant	ISO-10545-14
Safety Properties	Slip Resistance	>0.40	>0.40	ISO-10545-17

PACKING DETAIL

Product	Size	Pcs. / Box	Coverage Area / Box	Weight / Box
POLISHED VITRIFIED TILE (SOULBLE SALT)	60x60cm	4	1.44 sq. mtr.	26.50 kg.